

SCHELLING AH 8 (580)

ONLINE-
MASCHINENSEITE



MARKE **SCHELLING**

CODE **011039B**

MODELL **AH 8 (580)**

TYP **PLATTENAUFTEILSÄGEN WINKELANLAGE**

TECHNISCHE DATEN

For panels measuring 5600 x 2600 (2700 mm), thickness from 2 mm to 60 mm
N° 2 double-deck infeed roller conveyors, 1 x 7.100 mm long and 1 x 3.100 mm long
Hydraulic lifting table (5600 x 2700 mm ca.)
System with rubber wheels (11 top + 11 bottom) for panel pressure/feeding
Sliding bridge with 45 suction cups and 5 supports (for panel stack alignment)
1st Rear - Pusher, with No. 11 clamps / grippers
Rotating table (90° panel rotation) with plastic wheels
1st Panel Saw AH8 580 - Max cutting width mm 5600 (Max blade projection mm 165)
Scoring Unit (max. diameter saw / power) mm 200 (Kw 2,2 ca.)
Main Sawing Unit (max. diameter saw / power) mm 520 (Kw 32)
Adjustable speed of the saw carriage (m/min) 5 - 150
Sliding crosspiece with 7 pushers for cut panels
With 4 supports (for panel stack alignment) and 3 motorized chains
2° Rear - pusher, with No. 26 clamps/grippers (Grip-Push)
2nd Panel Saw - Max cutting width mm 2600 (Max blade projection mm 165)
Scoring Unit (max. diameter saw / power) mm 200 (Kw 2,2 ca.)
Main Sawing Unit (max. diameter saw / power) mm 520 (Kw 32)
Adjustable speed of the saw carriage (m/min) 5 - 150
Waste evacuation system with grinder VECOPLAN Mod. VTH 55/15/2 (55 kW)
Plastic wheels coated table for cut panel output
Stacking system for cut panels with N° 2 front support tables with air blowing system 400 x 6300 mm + N° 8 lifting tables (4 are 1300 x 1600 mm and 4 are 1300 x 1410 mm) - Total power KVA 130

FOTOS



01



02

Fotos

Code: 011039B




03



04




05

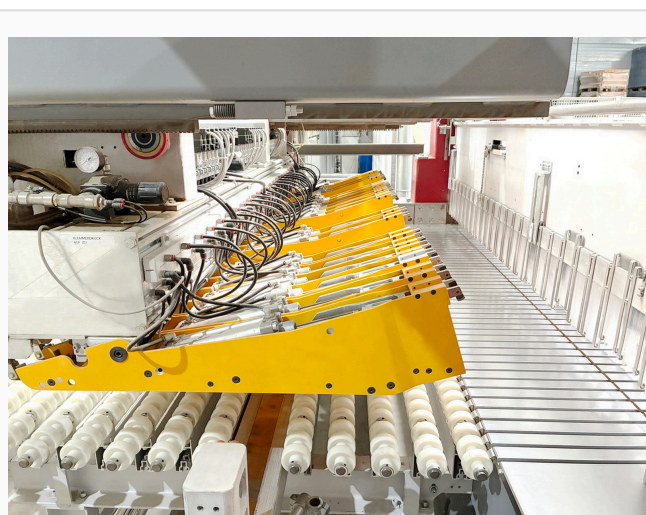

06




07

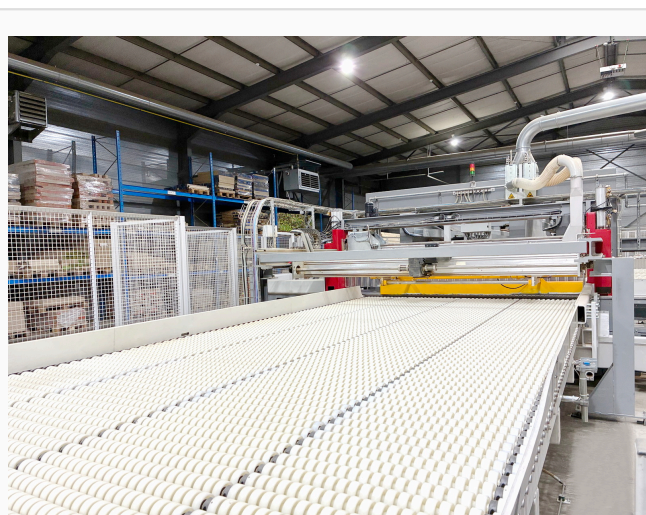

08

Fotos

Code: 011039B

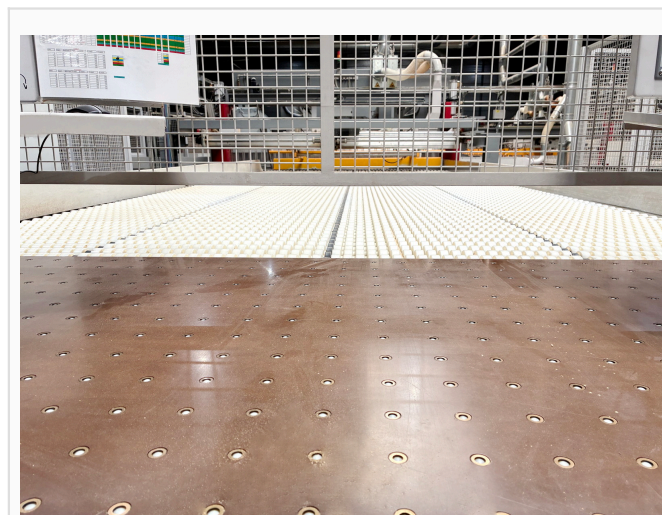

09



10



11



12



13



14

Fotos

Code: 011039B



15



16