

HOMAG BAZ 222 / 60 / KONLINE MACHINE
PAGEBRAND **HOMAG**CODE **K04021**MODEL **BAZ 222 / 60 / K**TYPE **C.N.C. WORKING CENTER (ROUTER WITH EDGE-BANDING)****TECHNICAL DETAILS**

C.N.C. WORKING CENTER with 4 axes (X-Y-Z-C) for routing, boring, cutting and edge banding
Goose-neck type - Front emergency carpets
Numerical Control Type PowerControl PC 85 - Software WoodWop
No. 10 Supports/Rails (mm 1340)
LED system (on the rails) for the vacuum pods positioning
Automatic Tools Changing System (Store at No. 18 folds)
Max. useful working area (X - Y - Z) mm 6175 x 1550 x 60
Max. useful working area (X - Y - Z) in edge banding mm 6000 x 1475 x 60
No. 2 Working areas - No. 2 Vacuum pumps (capacity m3/h 100 each)
Motorized carpet to evacuate the wastes from the working process
Total installed power KW 27
Working groups (top)
No. 17 Independent vertical boring spindles (power of the drilling head Kw 2,2)
No. 4 Independent horizontal boring spindles
No. 1 Vertical main Electro-spindle HSK F63 Kw 11
No. 1 Circular Saw 0°-90° diam. (mm) 125
No. 1 Edge Banding head on board (axe Y) Power Edge, Glueing Unit (Hot Melt + Quick Melt Unit)
Edges (tape) thickness in rolls (min/max) mm 0,4 - 3
Edge coils supporting unit (N. 2 reels/Coils)

PHOTOS

01



02

Photos

Code: K04021



03




04



05



06

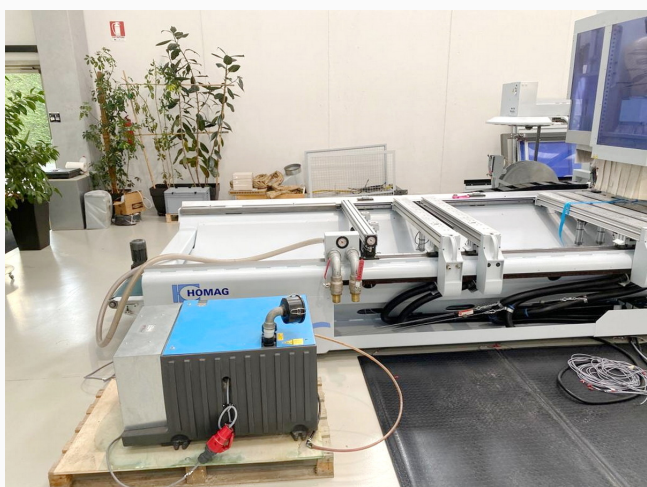


07



08

Photos

Code: K04021

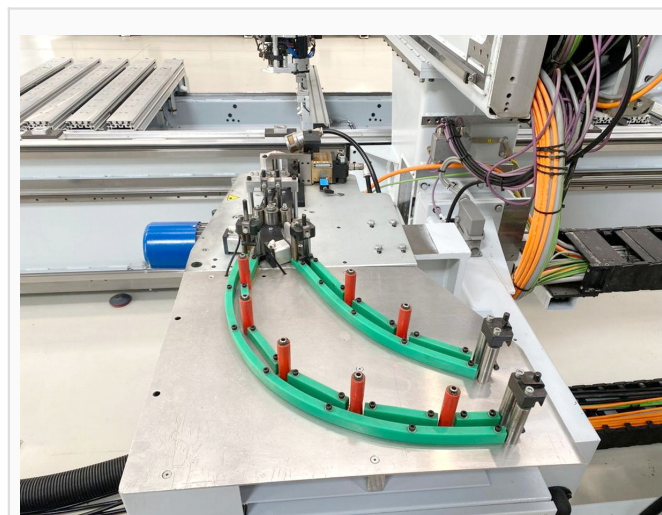

09



10



11



12



13



14

Photos

Code: K04021



15



16