

MORBIDELLI + RBO + HOMAG Flexa 912 + Selecta + KL 73СТРАНИЦА СТАНКА
ОНЛАЙНМАРКА **MORBIDELLI + RBO + HOMAG**КОД **238000**МОДЕЛЬ **Flexa 912 + Selecta + KL 73**ТИП **АВТОМАТИЧЕСКАЯ СВЕРЛИЛЬНО-ПРИСАДОЧНАЯ ЛИНИЯ****ТЕХНИЧЕСКИЕ ДАННЫЕ**

EDGE BANDING and CNC Flexible through-feed DRILLING and ROUTERING LINE

Min/Max workpieces (panels) width (X axis) with Flexa 912: mm 250 / 3000

Min/Max workpieces (panels) thickness (Z axis) with Flexa 912: mm 12 / 50

Min/Max workpieces (panels) length-depth (Y axis) with Flexa 912: mm 100 /1350 (о 650+650)

238000A) "DOUCET" motorised roller conveyor for feeding panels to the "HOMAG" edge-bander

238000B) "HOMAG" edge-banding machine, Model KL 73/A3/S2

238000C) "DOUCET" motorised roller conveyor for feeding edged panels to "MORBIDELLI" Flexa 912

238000D) "MAHROS" 90° transfer unit (infeeding "MORBIDELLI" Flexa 912)

238000E) "MORBIDELLI" Gantry (Portal) CNC (Drilling and Routing) Mod. Flexa 912

- N. 2 upper working head, EACH consisting of:

- 1 type T35M drilling head with 35 vertical spindles (21 on the Y-axis + 14 on the X-axis)

- 1 (movable) drilling head with 14 vertical spindles (on the Y-axis) for fittings

- 2 heads with 2 horizontal spindles each (4 total) on the Y-axis

- 1 HKS 63 vertical electric spindle (6.6 kW)

- N.2 horizontal units (1 R + 1 L) EACH with 21 drilling spindle (21 + 21 = total 42)

238000F) "MAHROS" 90° transfer unit (outfeeding "MORBIDELLI" Flexa 912)

238000G) "RBO (BIESSE)" Stacker (Bridge Frame), double station Mod. Selecta SC

ФОТОГРАФИИ

01



02

Фотографии


Код: 238000



03




04

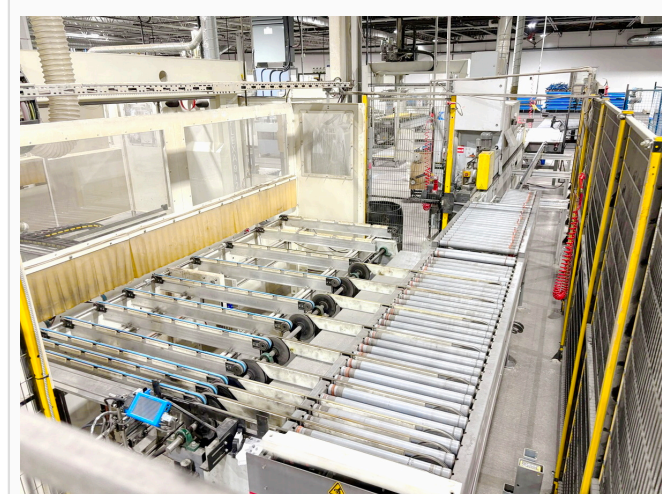


05



06

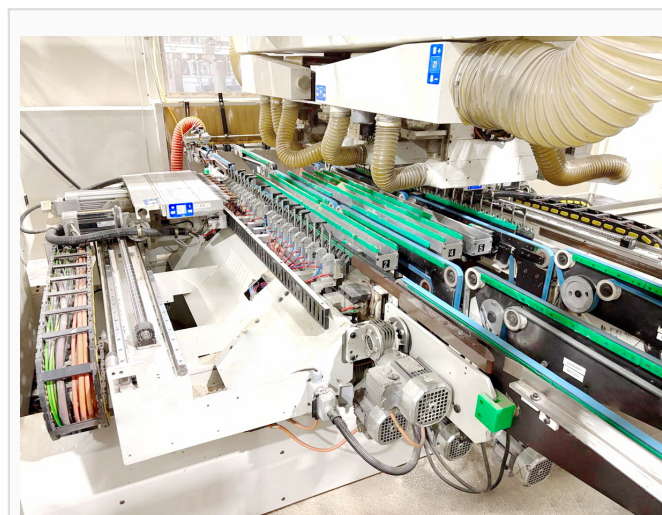


07

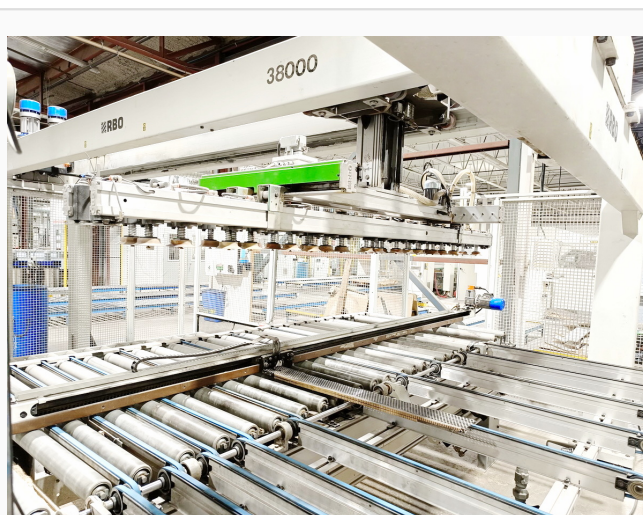


08

Фотографии

Код: 238000

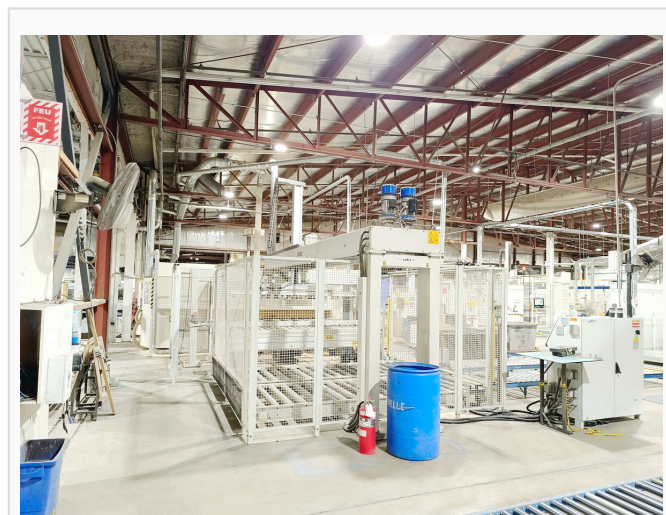

09

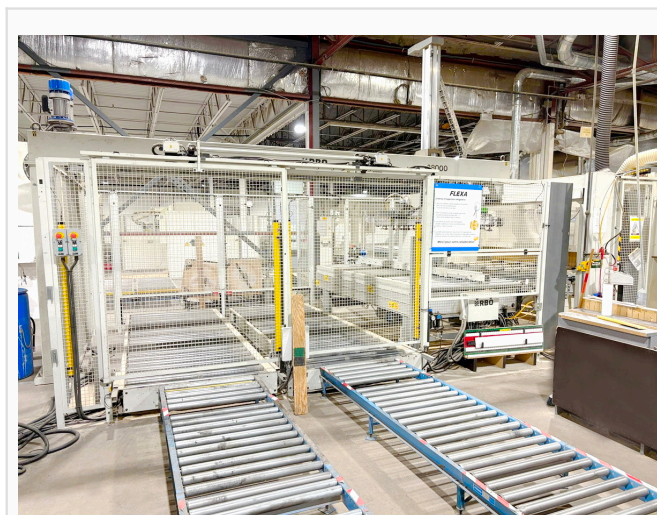

10