

IMA Combima / I / R75 / 1480

ONLINE MACHINE
PAGE



BRAND **IMA**

CODE **JZ1420**

MODEL **Combima / I / R75 / 1480**

TYPE **EDGE BANDER**

TECHNICAL DETAILS

FLEXIBLE SYSTEM OF SINGLE-SIDE SIZING AND EDGEBANDING FOR BATCH-SIZE ONE

Edges (band in rolls) thickness (Min/Max) mm 0,3 - 3

Panels thickness (min/max) mm 8 - 60

Numerical Control ICOS open

Feeding speed (adjustable) m/min 7-35

Automatic and accurate Panels in-feed system Mod. A2 / 30

Automatic professional (accurate and fast) panels return-system to the operator

In-feed fence, adjustable by N.C.

Pre-milling Unit (vertical joint trimmers) 75.34 (2 x Kw 6,6) adjustable by N.C.

No. 2 Glueing Units (P.U.R. Glue + Quick Melt system) 2 - VTG 3-48 + 286.205

Band Pressure zone. Height adjustment of the band adjustable by N.C.

Edge coils supporting unit (No. 48 reels)

Long Free Space

Snipping (end-cutting) unit 08.42 / 30 / B (Kw 0,66 x 2) (PNEU 0°-25°) 30m/ min

Rough Trimming unit 08.0555 (Kw 1 x 2)

Fine Trimming unit (Multi-profile, adjustable by N.C.) 08.0587 (Kw 0,66 x 2) 4 PROFILES

Spraying Unit (for sliding liquid)

Multi-Profile Copying unit by N.C (fine and contour trimming) KFA 30 (Kw 0,5 x 1) 30m/min

(4 PROFILES) group revamped in 2017

Profile edge scraping unit (Multi-profile, adjustable by N.C.) 08.516 (4 PROFILES)

Glue scraping unit 08.521 (CN horizontal positioning)


Spraying Unit (for polishing liquid) + Buffing unit 08.617 (Kw 0,18 x 4), Free Space

No. 3 Milling grooving units adjustable by N.C. 08.190 (Kw 4,5 x 2 + Kw 6,6 x 1)

PHOTOS



01

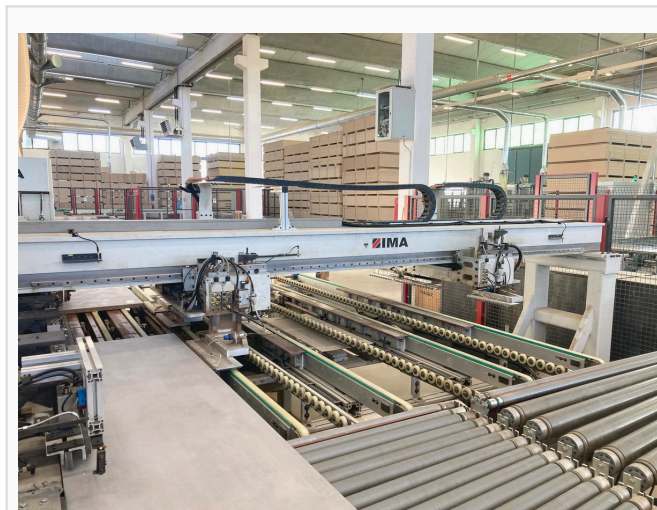

02

Photos

Code: JZ1420



03



04



05



06



07



08

Photos

Code: JZ1420



09




10



11



12

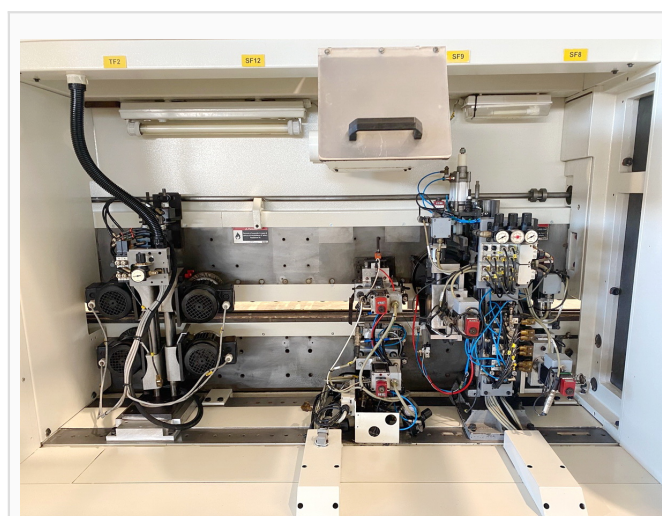

13




14

Photos

Code: JZ1420



15

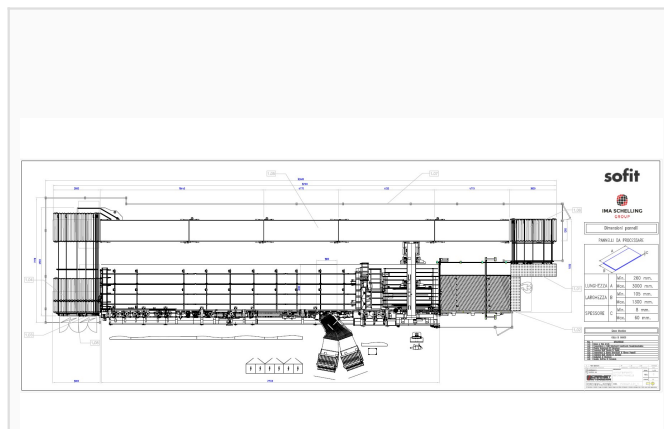

16